



# VS84 T Bar Brass Ball Valve

- Yellow T lever
- Virgin PTFE seats
- Viton stem seals
- Bi-directional flow for ease of installation
- BSPT connections
- Blow out proof stem
- Hard chromium plated ball
- Extension kits available
- Degreasing available


## Materials

Part	Material
Ball	Brass Chrome Plated
Ball Seat	PTFE
Body	Brass Nickel Plated
End Connection	Brass Nickel Plated
Handle	Steel
O-Ring	NBR
Stem	Brass Nickel Plated
Thrust washer	PTFE

## Pressure/Temperature Rating

-20oC to +170oC

PN64 PN40 Please see Dimension and weights for details

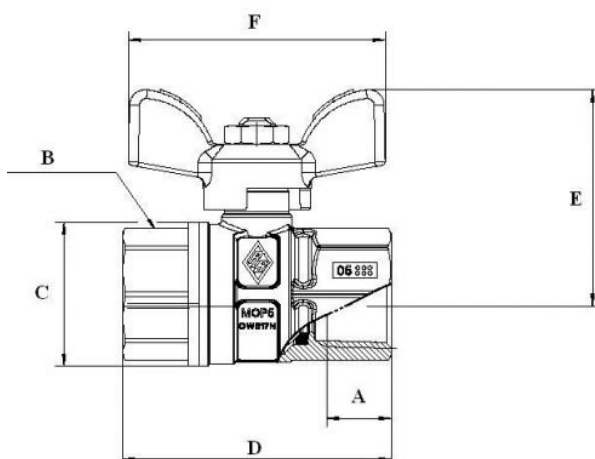

## Dimensions & Weights

Valve Size (inch)	1/4	3/8	1/2	3/4	1
Valve Size (mm)	8	10	15	20	25
Bore ( )	Full	Full	Full	Full	Full
A (mm)	11	11.4	15	16	19.1
B (mm)	20	20	20	25	31
C (mm)	23	23	30	36	43.5
D (mm)	58.5	59.5	59	69	81.5
E (mm)	47.5	47.5	46	57	59
F (mm)	50	50	50	60	60
PN (Bar)	64	64	40	40	40
Weight (Kg)	0.14	0.16	0.18	0.30	0.44

Fareham

**01329 283 425**

[valvestock.enquiries@wolseley.co.uk](mailto:valvestock.enquiries@wolseley.co.uk)